
# clear ahead




DIMENSION-POLYANT'S FLEX<sup>®</sup> line stands for "Fill Laminate Extra X". The FLEX<sup>®</sup> range of fabrics is suited to racing and cruising sails. Foundations of all FLEX<sup>®</sup> laminate constructions are strong fill and warp yarns. Additional 20° and 30° "Double X" patterns from the fill absorb multiple load situations. Thanks to its novel construction, FLEX<sup>®</sup> handles strain in six different directions, resulting in unprecedented shape retention characteristics. In addition to primary loads, off-angle loads in clew, head and tack areas, mid leech and luff are catered for. FLEX<sup>®</sup> will also absorb those dynamic loads that occur during sailing and enables excellent shape control. FLEX<sup>®</sup> styles are crosscut fabrics and available with several fibre densities which can be combined in a sail in accordance with the expected load situation. FLEX<sup>®</sup>'s firmly locked-up fiber matrix guarantees long performance life and superior durability.





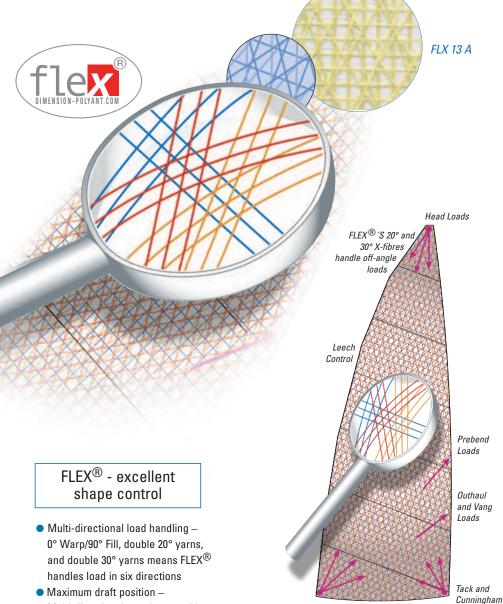

- Maximum draft position Multi-directional yarn layout addresses stability in draft position
- Leech stability –
   FLEX<sup>®</sup>'s double 'X's handle mid-leech loads of high- and low-aspect mains and genoas
- Step-up construction –
   Progressive weights in each FLEX<sup>®</sup> line allow step-up construction
- Tear strength –
   Strong, durable fill and warp yarns
   make FLEX<sup>®</sup> a tough, durable material
- Sail weight reduction –
   FLEX<sup>®</sup> has the ability to split weights
   from high-load to low-load areas
- Ease of construction –
   FLEX<sup>®</sup>'s two extra 'X's means there's
   no need to flip-flop panels



Loads

Style	Warp/Fill	30° X-Fibres	20° X-Fibres
FLX 08 A	4 x 4 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	
FLX 13 A	4 x 4 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 16 A	5 x 6 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 19 A	7 x 7 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 24 A	6 x 7 1,000 x 1,500 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid

Clew and

Outhaul Loads

FLX13 A- FLX 24 A single taffetta UV double taffetta UV



# DIMENSION-POLYANT GmbH, Germany Headquarters

Speefeld 7

1, Rue Newton

D-47906 Kempen Phone: +49 (2152) 891 0 Fax: +49 (2152) 891 149 info@dimension-polyant.com

#### DIMENSION-POLYANT SAS, France

Parc Technologique F-17000 La Rochelle Phone: +33 (0) 546 282 201 Fax: +33 (0) 546 412 840 larochelle@dimension-polyant.com

#### DIMENSION-POLYANT SAS, France

Port de la Pointe Rouge F-13008 Marseille Phone: +33 (0) 491 736 628 Fax: +33 (0) 491 722 505 marseille@dimension-polyant.com

### DIMENSION-POLYANT UK Ltd., United Kingdom

Unit 11, Kingdom Close Kingdom Business Park Segensworth East GB-Fareham Hampshire P015 5TJ Phone: +44 (1489) 570 551 Fax: +44 (1489) 570 451 uk@dimension-polyant.com

## DIMENSION-POLYANT Inc., USA

78, Highland Drive
USA-Putnam CT 06260
Phone: +1 (860) 928 8300
Fax: +1 (860) 928 8330
info@us.dimension-polyant.com

### DIMENSION-POLYANT Sailcloth PTY Ltd., Australia

P.O. Box 825 Unit 7/9 Powells Rd. AUS-Brookvale N.S.W. 2100 Phone: +61 (2) 9905 9565 Fax: +61 (2) 9905 9569 dp-aus@dimension-polyant.com

### DIMENSION-POLYANT.COM

